

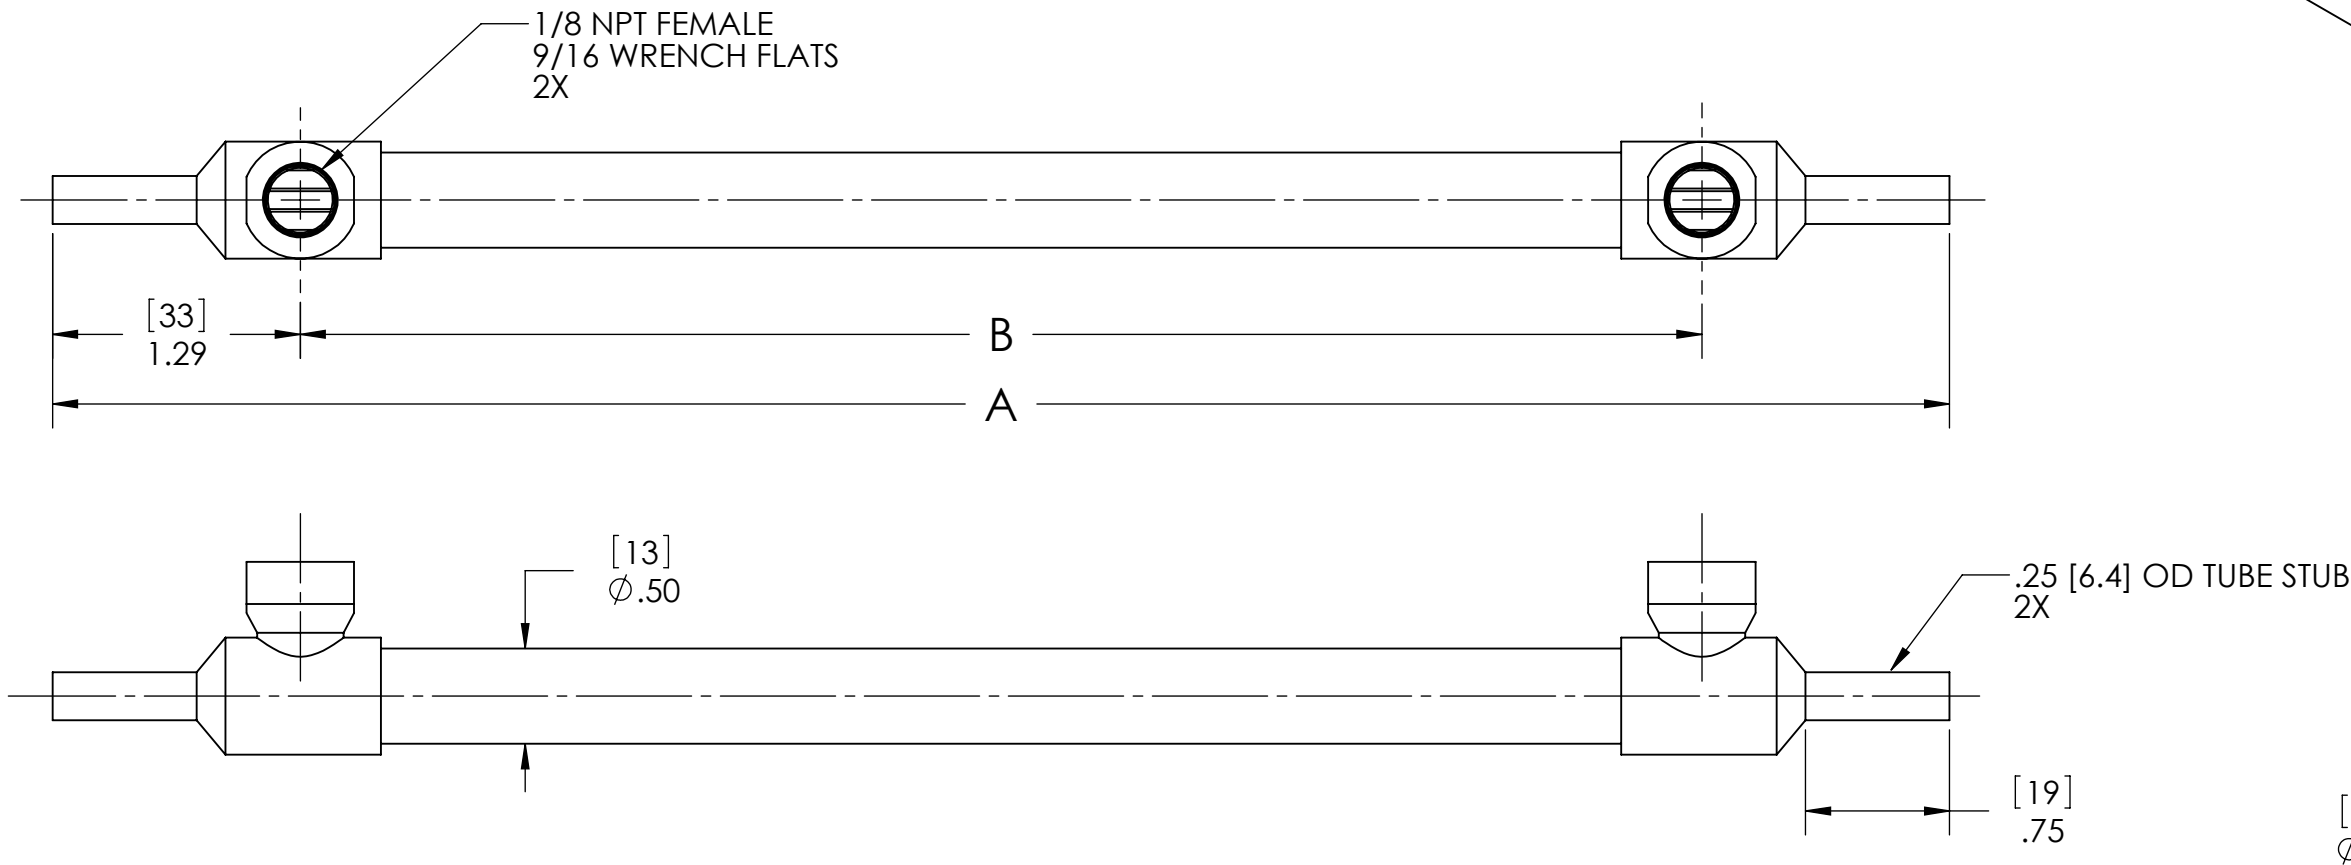


- NOTES:
1. MATERIAL: 316L STAINLESS STEEL, NICKEL BRAZED.
 2. ALL EXTERNAL SURFACES BUFF POLISH FINISH.
 3. MAXIMUM OPERATING CONDITIONS:
 - PRESSURE: TUBESIDE - 1500 psi (103 bar)
SHELLSIDE - 1000 psi (69 bar)
 - TEMPERATURE: 800°F (425°C)
 - PRESSURE FOR STEAM SERVICE: 125 psi (8.6 bar)
 - FLUID TEMPERATURE DIFFERENCE:
 $(T_{HOT})_{AVE} - (T_{COLD})_{AVE} \leq 125^{\circ}F (70^{\circ}C)$

- #	TUBE COUNT	TUBE LENGTH		DIM A		DIM B		WEIGHT EMPTY		TRANSFER AREA	
		in	mm	in	mm	in	mm	lb	kg	in²	cm²
- 01	7	4.00	102	5.88	149	3.32	84	0.23	0.10	7.84	51
- 02		8.00	203	9.88	251	7.32	186	0.33	0.15	16.10	104
- 03		12.00	305	13.88	353	11.32	288	0.43	0.20	24.37	157

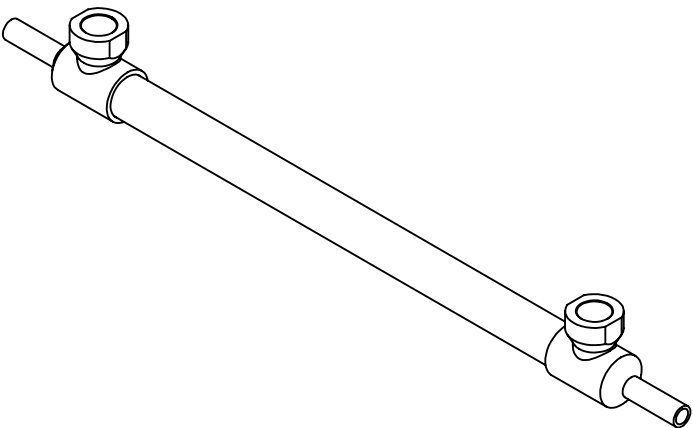

ALSO AVAILABLE

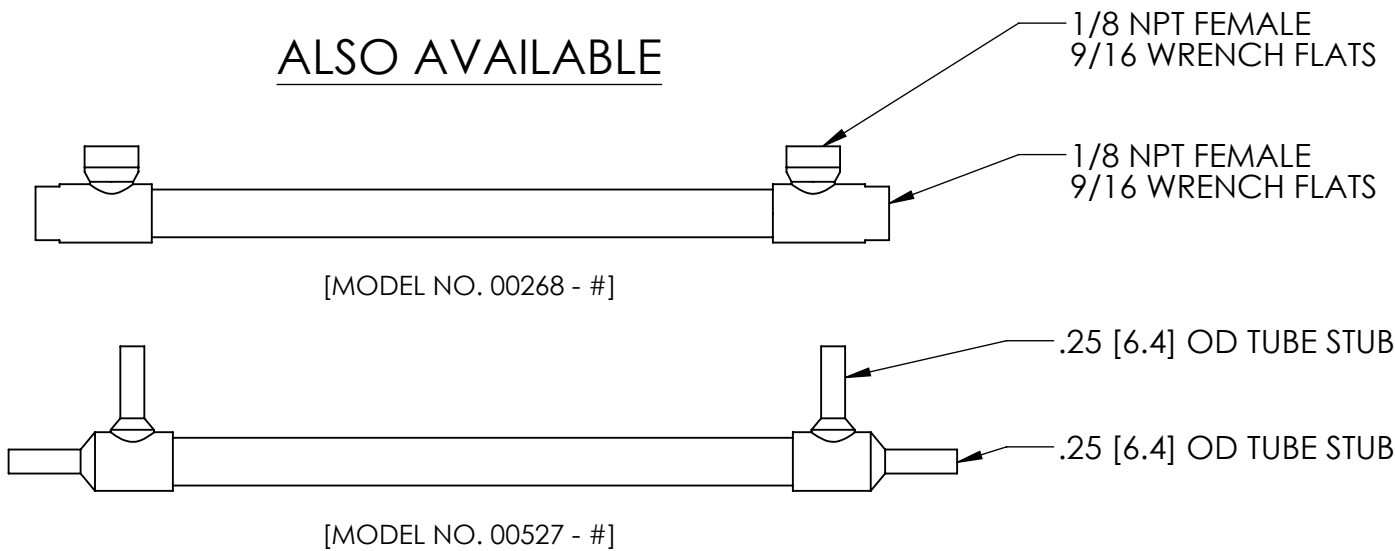


ALL DIMENSIONS ARE IN INCHES [mm]

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF EXERGY, LLC. ANY REPRODUCTION, DISCLOSURE, OR USE, IN PART OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF EXERGY, LLC IS PROHIBITED.

PRODUCT SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. MANUFACTURER ASSUMES NO LIABILITY FOR MISUSE OR ABUSE OF PRODUCT. SPECIFIC WARRANTY INFORMATION IS AVAILABLE UPON REQUEST.

THIRD ANGLE
PROJECTION



EXERGY
HEAT TRANSFER SOLUTIONS

320 ENDO BLVD.
GARDEN CITY, NY 11530
USA (516)832-9300
www.exergyllc.com

**SHELL & TUBE HEAT EXCHANGER
10 SERIES
TUBE SIDE TUBE STUB**

MODEL NO. **00573 - #**

DATE **9/19/2014** SCALE **1:1** SHEET **1 OF 1**

MODEL NO.

00573 - #