



NOTES:
1. MATERIAL: 316L STAINLESS STEEL.
• INNER TUBE: .375 OD X .049 WALL.
• OUTER TUBE: .750 OD X .049 WALL.

DESIGN DATA	
INNER TUBE SIDE PRESSURE	3980PSI @ 200F 3000PSI @ 800F
OUTER TUBE SIDE PRESSURE	1900 PSI @ 200F 1000 PSI @ 800F
INNER TUBE SIDE HYDROTEST PRESSURE	6300 PSI
OUTER TUBE SIDE HYDROTEST PRESSURE	3000 PSI
CORROSSION ALLOWANCE	NONE
RADIOGRAPHY	NONE
MDMT	-155F

# OF COIL	WEIGHT EMPTY		TRANSFER AREA	
	lb	kg	ft²	m²
11	12.29	5.6	1.7	.16

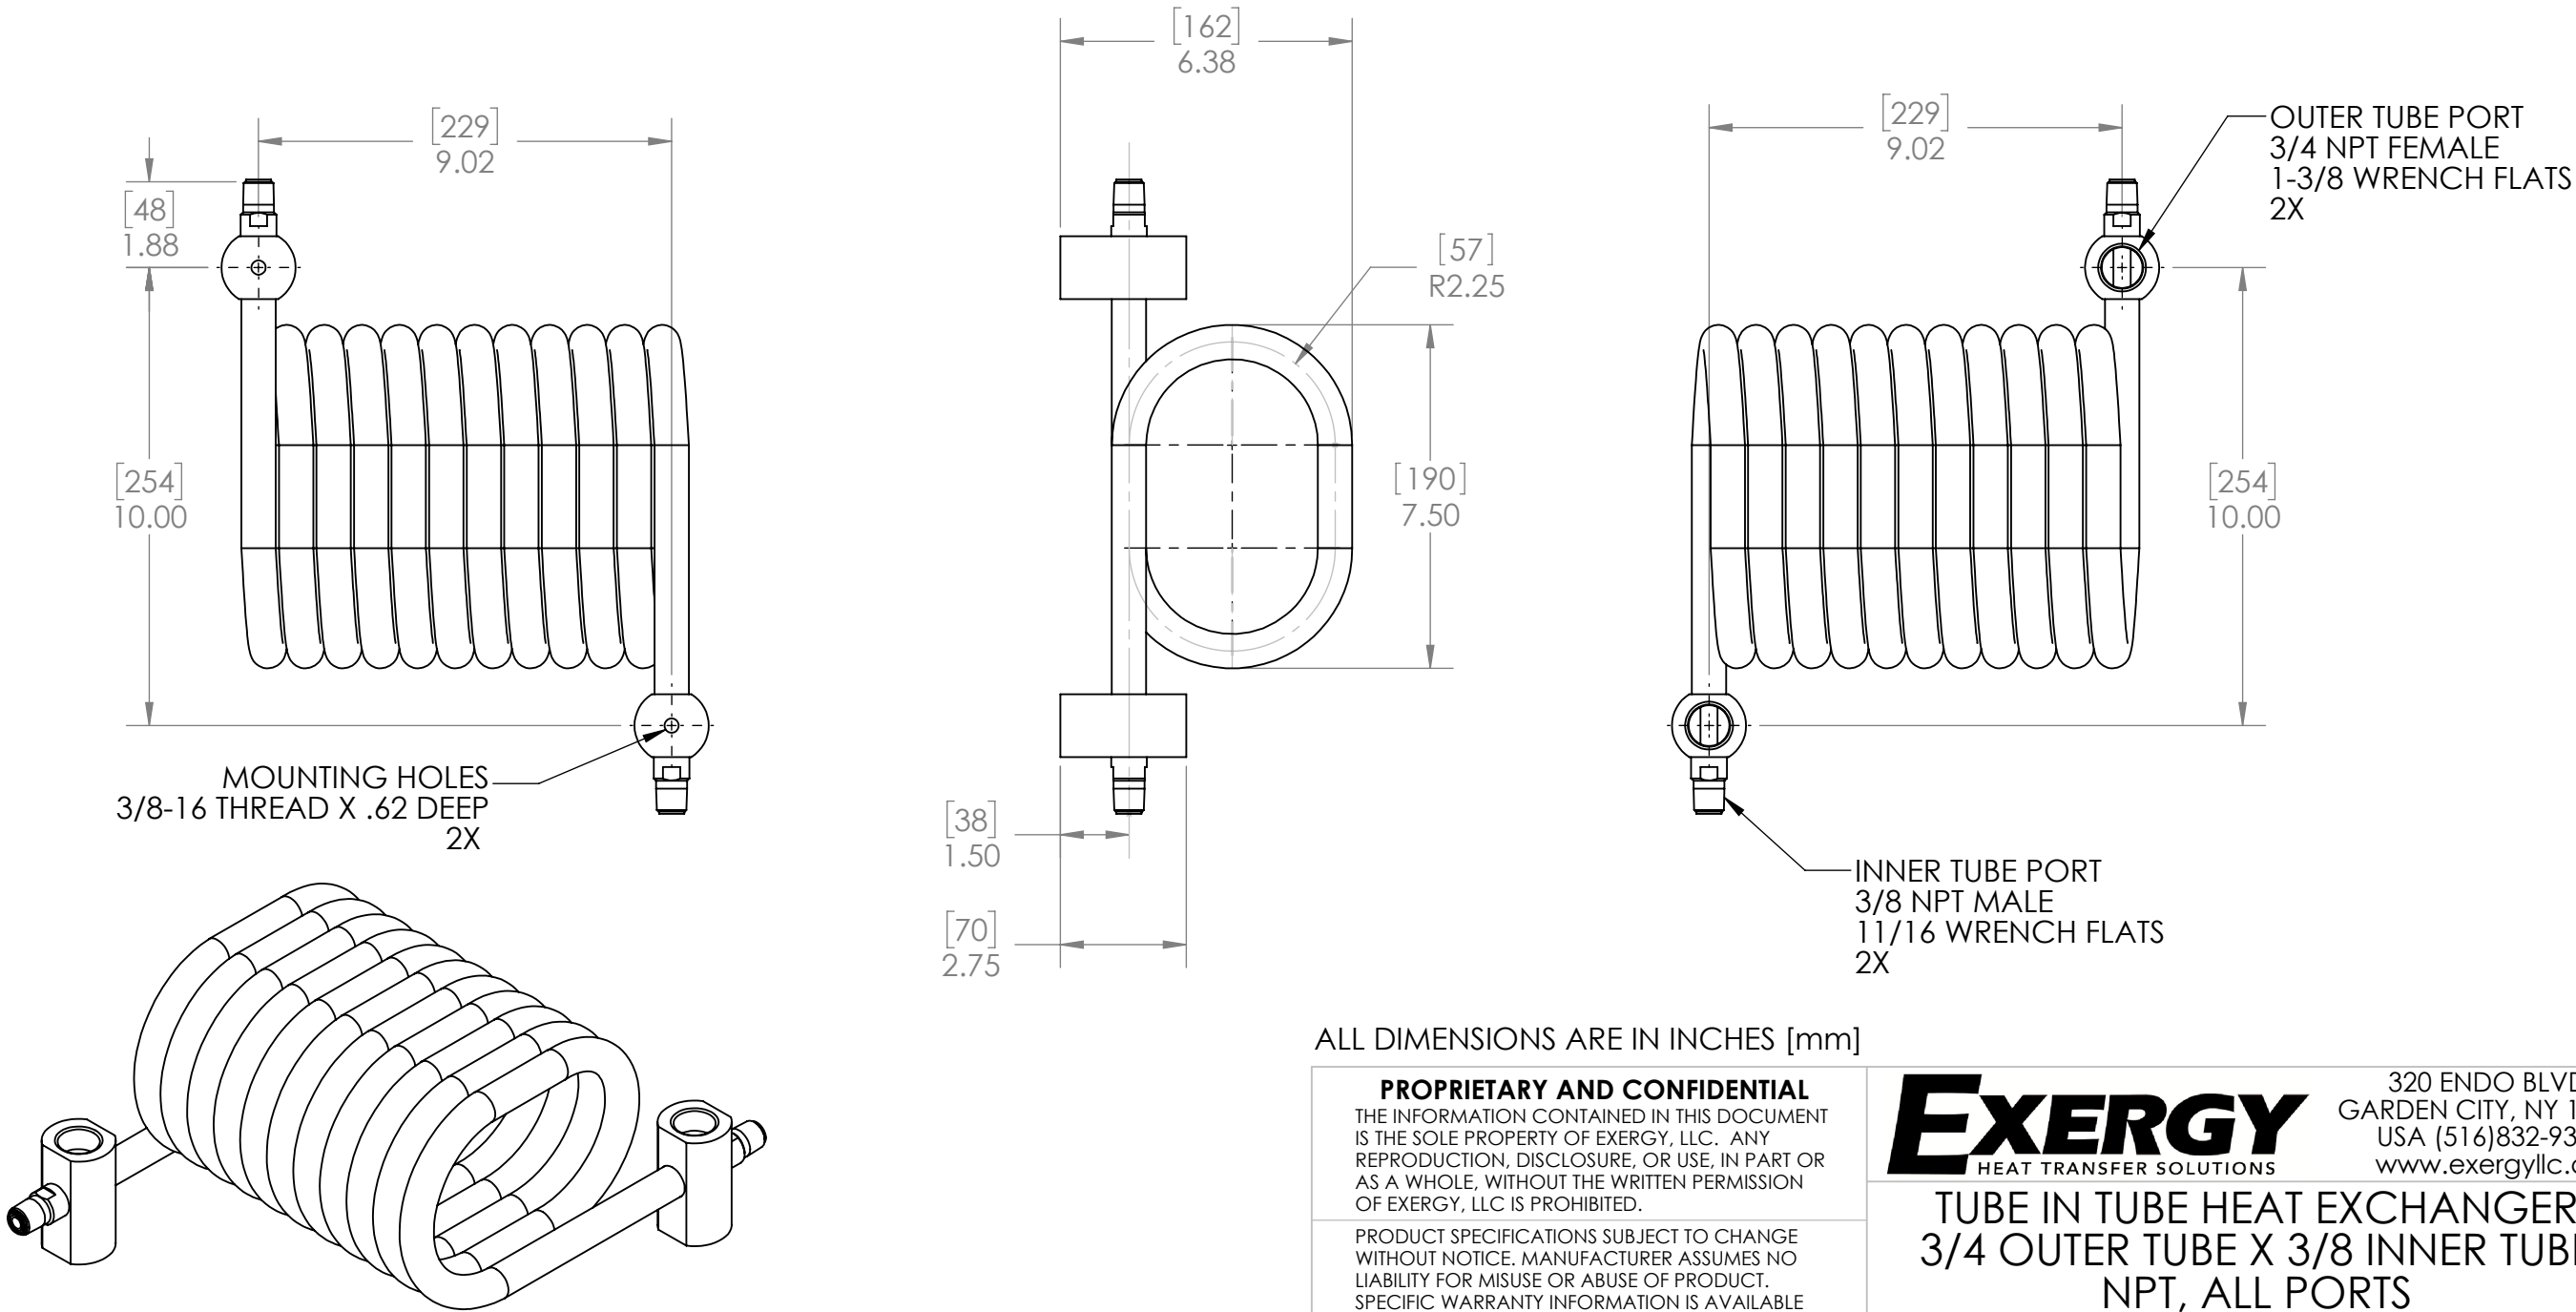

ALL DIMENSIONS ARE IN INCHES [mm]

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF EXERGY, LLC. ANY REPRODUCTION, DISCLOSURE, OR USE, IN PART OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF EXERGY, LLC IS PROHIBITED. PRODUCT SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. MANUFACTURER ASSUMES NO LIABILITY FOR MISUSE OR ABUSE OF PRODUCT. SPECIFIC WARRANTY INFORMATION IS AVAILABLE UPON REQUEST. THIRD ANGLE PROJECTION 	ExERGY HEAT TRANSFER SOLUTIONS	320 ENDO BLVD. GARDEN CITY, NY 11530 USA (516)832-9300 www.exergyllc.com
	TUBE IN TUBE HEAT EXCHANGER 3/4 OUTER TUBE X 3/8 INNER TUBE NPT, ALL PORTS	
	MODEL NO. AS-00448	
	DATE 1/22/2019	SCALE 1:4

MODEL NO.
AS-00448